



M-Series · Commercial Safe


Up to Pace...

In today's fast paced world, time is a luxury that many cannot afford to waste. Factors such as convenience and the need for fast, accurate service are now more important than ever. That's why we created the M-Series. The Lion M-Series safe is made to suit businesses that cater to the fast paced consumer. Businesses like fastfood outlets, service stations and clubs where cash transactions take place.



Quality tested & certified by
SIRIM and FRIM

TECHNICAL DIMENSION & DETAILS

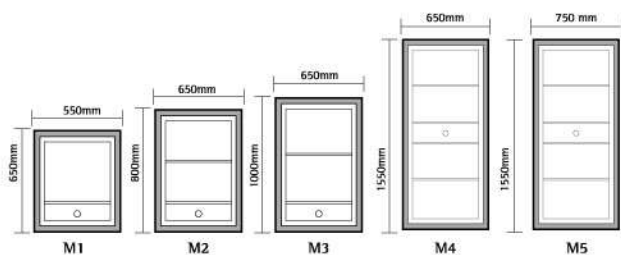

DIMENSION OF BODY

		M1			M2			M3			M4			M5		
		W	D	H	W	D	H	W	D	H	W	D	H	W	D	H
EXTERNAL	mm	550	600	650	650	700	800	650	700	1000	650	700	1550	750	850	1550
INTERNAL	mm	395	410	500	495	510	650	495	510	850	495	510	1400	595	660	1400
CAPACITY	litres	81			164			214			353			550		
NET WEIGHT	kgs	324			490			565			845			1038		
SHIPPING																
DIMENSION	mm	670	750	900	770	850	1050	770	850	1250	770	850	1800	870	1000	1800
VOLUME	cu.m	0.45			0.69			0.82			1.18			1.57		
GROSS WEIGHT	kgs	380			550			647			953			1142		
BOLTS																
TOP-EDGE-																
BOTTOM																
DRAWER																

OPENING DETAILS

		M1	M2	M3	M4	M5
Overall depth	A mm	600	760	760	760	910
Door Open 90°	B mm	1092	1202	1202	1202	1542
Door Open 180°	C mm	900	1190	1190	1190	1390

OTHER DETAILS

Unit with Drawer Trap	Net Weight KGS	Dimension (External) W D H			Shipping Dimension W D H			Shipping Volume	Gross Weight	Bottom Drawer
MT1	412	550	600	808	670	750	1060	0.54	462	Not Provided
MT2	618	650	700	958	770	850	1210	0.80	683	Provided

SPECIAL FEATURES

- MegaMix 1: A newly developed burglar-and-fire resistant agglomerate of high density and strength, impervious to the blowtorch as well as providing effective resistant to hand and mechanical tools.
- Body: Of monolithic construction, the overall thickness is 75mm, incorporating MegaMix 1 Material.
- Door: The protective thickness is 55mm embodying MegaMix 1 Material reinforced with steel and a drill-resisting plate protecting the lock area.
- Additional protection against point-attack is given to vital parts of the boltwork by means of drill-resisting deflectors.
- The Standard locking is one Cawi (Germany) keylock, plus a S & G 3-wheel combination lock.
- Boltwork: Improved boltworks with top and bottom bolts and fixed rebate at the rear. Each bolt is 32mm in diameter.
- A passive relocking device, independent of the locks, will automatically block the moving boltwork in the event of a determined attack against the door.
- Base Fixing: Available as an optional extra.

Optional inner compartment(combi safe)



Optional digital lock

